


Case 1: constant drill pipe

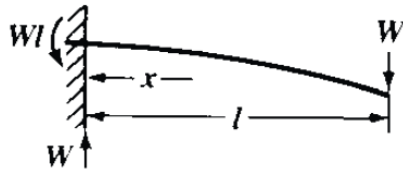

Page 262 Machinery's Handbook Guide 28th Edition

Modulus of Elasticity

$$E := 30 \cdot 10^6 \text{ psi}$$

Load

$$W := -1000 \text{ lbf}$$


Some distance as indicated

$$x := 10 \text{ ft}$$

Some distance as indicated

$$L := 10 \text{ ft}$$

Finding Moment of Inertia:

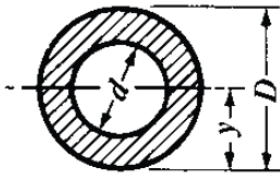

Page 238 Machinery's Handbook Guide 28th Edition

Outside Diameter

$$D := \left(6 + \frac{5}{8} \right) \text{ in}$$

Inside Diameter

$$d := 5.901 \text{ in}$$

Moment of Inertia

$$I := \frac{\pi(D^4 - d^4)}{64} = 35.04 \cdot \text{in}^4$$

section modulus of the cross-section of the beam

$$Z := \pi \frac{(D^4 - d^4)}{32 \cdot D} = 10.578 \cdot \text{in}^3$$

Stress at x

$$s := \frac{W}{Z}(L - x) = 0 \cdot \text{ksi}$$

Stress at mount

$$s := \frac{(W \cdot L)}{Z} = -11.344 \cdot \text{ksi}$$

Deflection

$$y_1 := \frac{W \cdot x^2}{6E \cdot I}(3 \cdot L - x) = -0.548 \cdot \text{in}$$

Case 2: Stress Pipe hang-off

$$D_w := D$$

$$x_1 := L - x = 0 \text{ in}$$

$$y_2 := \left(\frac{1}{E} \right) \cdot \int_0^L \int_0^x \frac{[W \cdot (x_1)]}{\left[\frac{\pi}{64} \cdot \left[\left[\frac{(D_w - D) \cdot x_1}{L} \right] + D \right]^4 - d^4 \right]} dx dx = 0 \text{ in}$$

$$y_3 := \left(\frac{1}{I \cdot E} \right) \cdot \int_0^L \int_0^x [W \cdot (x_1)] dx dx = 0 \text{ in}$$

